




SOLAR ACCESSORIES


MC4 Connector

Type/Series	Product Description	Rated Current	Product Image
CN40-A003 / CN40-A004	MALE / FEMALE, SELF - LOCKED for 2.5mm ² , 4mm ² , 6mm ² Wire	25 Amp	
CN4A-A001 / CN4A-A002	MALE / FEMALE, SELF - LOCKED For 4 mm ² Wire	33 Amp	
CN4A-A003 / CN4A-A004	MALE / FEMALE, SELF - LOCKED For 2.5 mm ² Wire	25 Amp	
CN4A-A025 / CN4A-A026	MALE / FEMALE, SELF - LOCKED For 6 mm ² Wire	41Amp	
CN4A Series Needs special release tool (CT10 - 0106)			


Technical Specification

Rated Voltage	1000V _{dc}	Protection Degree	IP 67
Ambient Temperature	- 40° to 85° C	Application Class	A

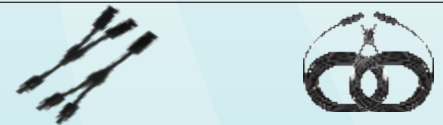
Fuse Connector

Part No	CM14-0091	Product Image
Rating	600V _{dc} & 1000V _{dc} , 30A	
Protection Degree	IP 67	
Temperature Range	- 40°C to + 85°C	
Pin Dimension	∅ 4.0 mm	
Fuse Dimension	10 x 38 mm	

PV Branch Connector

Part No		Product Description	Rated Current		Product Image
TUV	UL		TUV	UL	
BN40-0001	BN40-0027	SELF - LOCKED / 2 MALE & 1 FEMALE	25Amp	20Amp	
BN40-0002	BN40-0026	SELF - LOCKED / 2 FEMALE & 1 MALE	25Amp	20Amp	

We also provide solar (dc) cable (4~6mm²) TUV approved & inter-connects for various applications.



Disclaimer : Due to constant quality improvement at our R&D center, specifications/models may change without prior notice.

To know more, visit our ELWORLD showroom at B-25, Lajpat Nagar-II, Delhi
Call 1800-3000-7799 | SMS ELSOLAR to 56161 | www.elsolar.in